
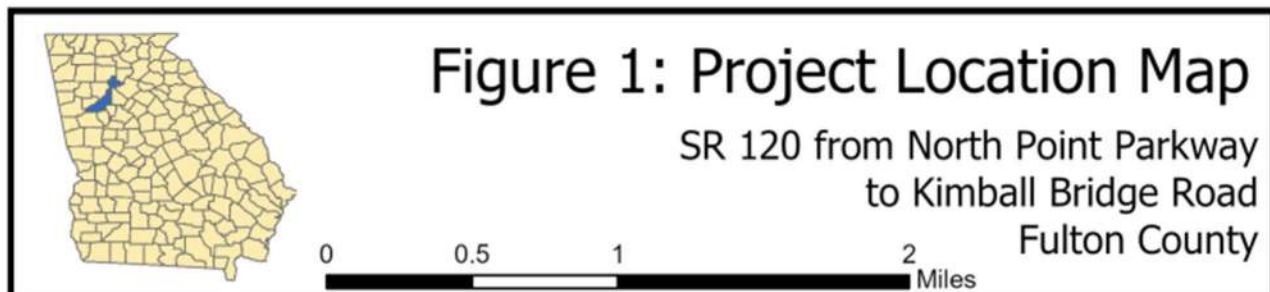


PROJECT LOCATION MAP

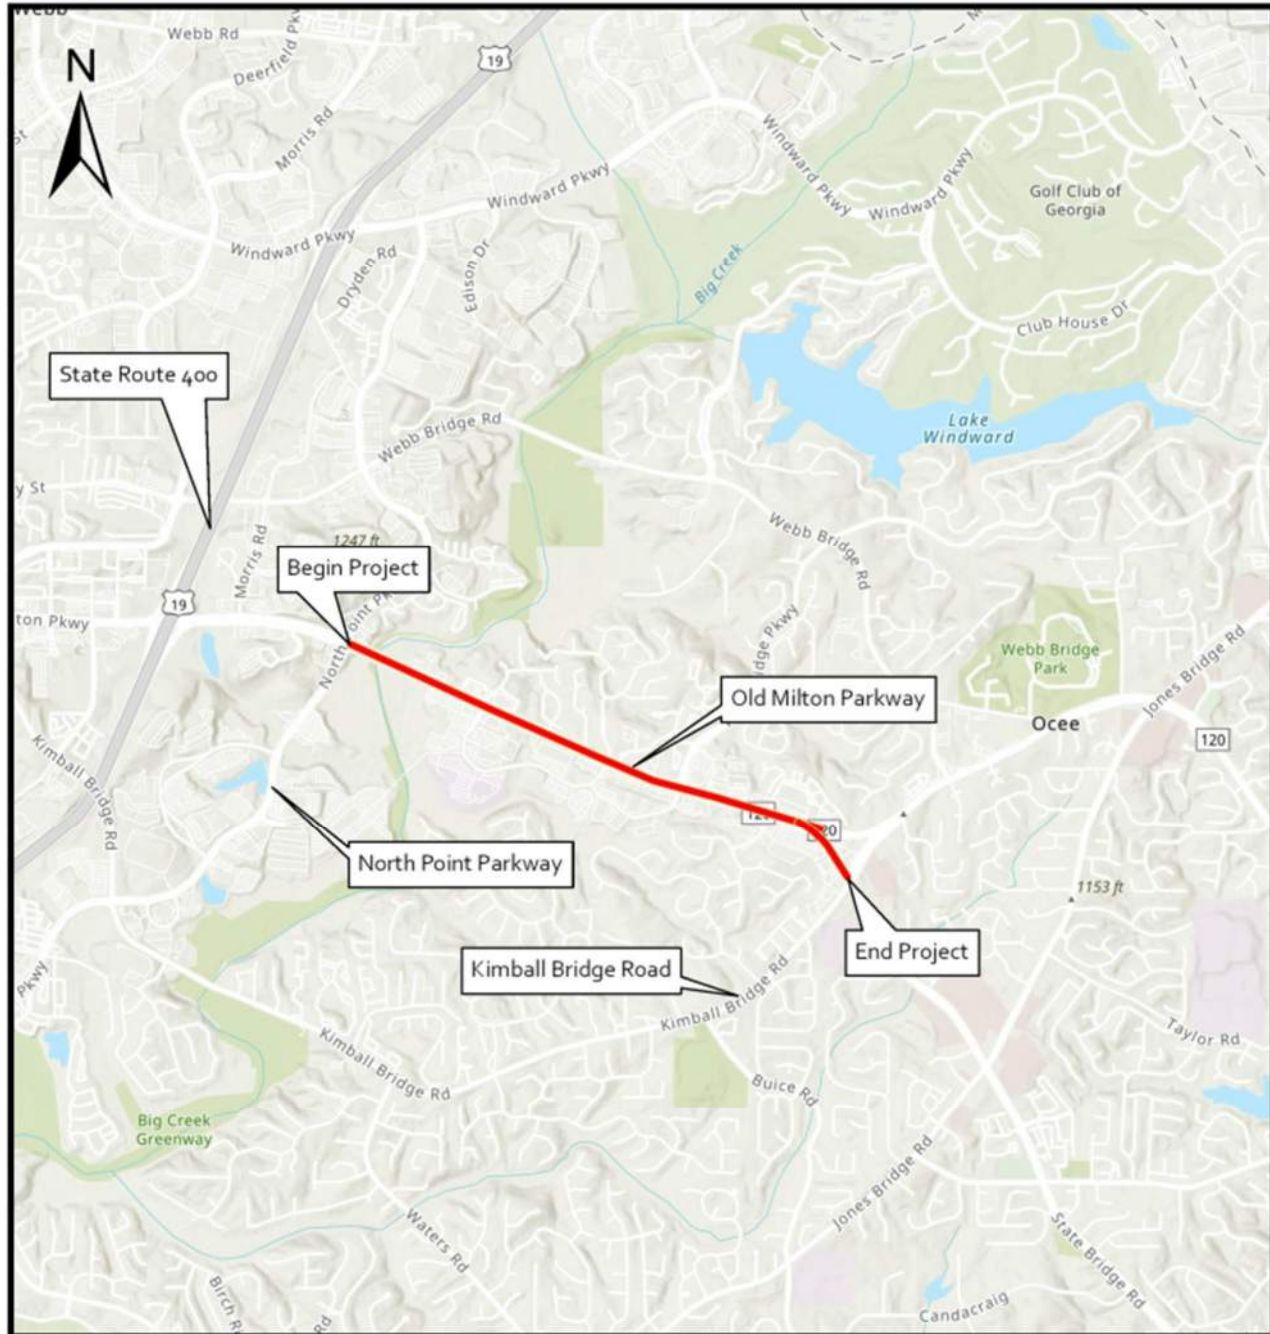

PLANNING AND BACKGROUND

Prepared By: AECOM **Date:** 3/19/2021

Project Justification Statement:

This project was programmed at the request of the City of Alpharetta to improve congestion relief along the segment of SR120/Old Milton Parkway (OMP) between SR400 and east to the City limit at Kimball Bridge Road, a length of two (2) miles. Motorists currently experience significant delays and above average crash rates along this segment of roadway. It is functionally classified as an urban principal arterial and is the primary commuter route for the large residential areas, in the City of Johns Creek and on the east side of Alpharetta, west to SR400. It also provides critical east-west connectivity linking the SR400 and Interstate-85 corridors. The Department recognizes the proposed project will improve connectivity to SR400 and the new managed lanes system proposed in the PI0001757 SR400 Express Lanes Project and scheduled to open to traffic in 2026. The need for this proposed project is supported by its future anticipated congestion relief and auxiliary benefit to the SR400 Express Lanes Project. This project coupled with the adjacent City of Johns Creek Project would provide improved capacity to almost six (6) miles of principle arterial roadway in the north metro area drastically improving mobility for motorists to and from SR400. [\(See Attachment 3 for complete PJS\)](#)

Existing conditions:

The existing typical section of Old Milton Parkway within the project limits consists of two (2) 12-ft lanes in each direction with urban outside shoulders including sidewalks and a 42-ft rural, depressed, grass median. The project also includes two existing bridges (EB & WB), that span over Big Creek and the Big Creek Greenway Trail. The existing right of way width is typically 140-ft, but it varies slightly throughout the corridor from 135-ft to 160-ft. The only major signalized intersection within the project are the termini, North Point Parkway and Kimball Bridge Road, both four (4) lane urban arterials. Otherwise, the remaining signalized intersection within the project serve commercial developments that are largely unconnected.

Other projects in the area:

- PI 0001757 SR400 from N SPRINGS MARTA STATION TO MCFARLAND PARKWAY-EXPRESS LN. This project is part of GDOT's Major Mobility Investment Program (MMIP), addresses one of the most congested facilities in metro Atlanta, and is one of the Department's most important projects right now. The addition of Express Lanes (EL) to this corridor will provide reliable trip times from I-285 to McFarland Road. The proposed Express Lanes will be constructed to directly connect to the future I-285 Top End Express Lanes. This mobility enhancing project would consist of two Express Lanes in each direction along SR 400 between the North Springs MARTA station and McGinnis Ferry Road and one Express Lane in each direction from McGinnis Ferry Road to just north of McFarland Road. Intermediate access points to the ELs would be provided throughout the corridor. Construction will begin Q2 of 2022 with completion in 2027
- PI 0008444 SR 400 FROM CR 209/SPALDING DR TO CR 458/MCFARLAND ROAD is a project to add a flex lane along the shoulder of SR400. Funding is programmed in 2052.
- The City of Johns Creek has a long-range project programmed in their SPLOST, JCR-013, to widen the section of State Bridge Road immediately east of PI 0017187 from four (4) to six (6) lanes.

MPO: Atlanta TMA TIP #: FN-176
Congressional District(s): 6

Federal Oversight: ☐ PoDI ☒ Exempt ☐ State Funded ☐ Other

Projected Traffic: 24 HR T: 3.0 % Current Year (2020): 51,000
Open Year (2027): 56,600 Design Year (2047): 62,525

Traffic Projections Performed by: AECOM

Date approved by the GDOT Office of Planning: 3/1/2021

AASHTO Functional Classification (Mainline): Principal Arterial

AASHTO Context Classification (Mainline): Suburban

AASHTO Project Type (Mainline): Reconstruction

Is the project located on a NHS roadway? ☐ No ☒ Yes

Complete Streets - Bicycle, Pedestrian, and/or Transit Standard Warrants:

Warrants met: ☐ None ☒ Bicycle ☒ Pedestrian ☒ Transit

SR120 meets Bicycle Warrant 3; however, bicycle accommodations are not currently proposed. The project's need & purpose is limited to increasing the vehicle capacity and the local right of way budget is constrained. This is not a full reconstruction project and adding bike facilities would significantly increase the scope of improvements. Minimum width bike facilities would not be desirable on such a high-speed, high-volume road. The City of Alpharetta has prioritized a parallel corridor to the north, Webb Bridge Rd., for bicycles (see map below). Webb Bridge Rd. is a lower volume, lower speed, two-lane roadway that is more appropriate for bicyclists. There is also a bicycle-access point to the Big Creek Greenway along Webb Bridge Rd. whereas SR120 only has pedestrian access (stairs).



SR120 meets Pedestrian Standard Warrants 1 & 2. Sidewalk will be provided along the project corridor.
SR120 meets Transit Standard Warrant 1. Coordination with MARTA will occur as MARTA Bus route 185 is within the project limit.

Is this a 3R (Resurfacing, Restoration, & Rehabilitation) Project? ☒ No ☐ Yes

Pavement Evaluation and Recommendations

Initial Pavement Evaluation Summary Report Required? ☐ No ☒ Yes

Feasible Pavement Alternatives: ☒ HMA ☐ PCC ☐ HMA & PCC

The project does not propose extensive replacement of the existing asphalt pavement which is in relatively good condition. Mill and inlay of the existing pavement with full depth asphalt widening is the recommendation from the

Pavement Evaluation Report. The only exception area is around the bridge where the Concept design is conservatively accounting for a slight increase in profile grade to accommodate the bridge (see Major Structures section); this area would be full-depth pavement.

Is the project located on a Special Roadway or Network? ☒ No ☐ Yes

Do the limits of the project include one or more signalized intersections? ☐ No ☒ Yes

Signal timing and historical count data requested through RTOP.

Is Federal Aviation Administration coordination anticipated? ☒ No ☐ Yes

Note “Any vertical construction equipment, such as cranes, in excess of 200-ft above the roadway elevation must be evaluated by the FAA. Evaluation by filling of Notice to Proposed Construction FAA Form 7460-1 must be accomplished not earlier than 18 months and not later than 120 days prior to construction” will be added to construction plans.

DESIGN AND STRUCTURAL

Description of the proposed project:

This project will widen SR120/Old Milton Parkway from four to six lanes between North Point Parkway and Kimball Bridge Road, a distance of two miles, within the City of Alpharetta, Fulton County, Georgia. The existing typical section of OMP consists of two 12-ft lanes in each direction with urban outside shoulders including sidewalks and a 42-ft rural, depressed, grass median. The project proposes to add one additional 11-ft lane in each direction separated by a 20-ft raised median. The project will replace the two existing bridges (EB & WB), that span over Big Creek and Big Creek Greenway Trail, with one wider bridge. Reconstruction of the outside shoulders will be minimal. The construction will occur almost entirely within the median, except immediately around the bridge replacement and in a few isolated areas where existing sidewalk gaps will be filled. The existing right of way (ROW) width is typically 140-ft, but it varies slightly throughout the corridor from 135-ft to 160-ft. The proposed ROW width will be largely the same, except in the area immediately around the bridge replacement where it may widen out to 170-ft.

Major Structures:

Structure	Existing	Proposed
Bridge ID # 121-0077-0 SR 120 WBL over Big Creek	The existing bridge was constructed in 1979. The existing bridge is 190'-0" long and 48'-0" wide (out to out) and consists of five prestressed concrete box girder spans. The existing section includes 2 - 1'-6" wide jersey barriers, 2 - 11'-0" travel lanes, 2 - 10'-0" turn lanes, 1 - 2'-0" shoulder and 1 - 1'-0" shoulder	A single bridge is proposed to replace the current parallel bridges. The proposed bridge is approximately 190'-0" long and 145'-5" wide (out to out). The proposed section includes 2 - 1'-1" barriers, 2 - 11'-6" sidewalks (to match the roadway shoulder of 6' front grass strip + 5' sidewalk), 1 - 6'-0" raised median, 1 - 14'-0" buffer, 3 - 12'-0" WB travel lanes, 2 - 12'-0" WB turn lanes, 3 - 12'-0" EB travel lanes and 2 - 2'-0" shoulders. Concept-level bridge hydraulics show the bridge does not need to be lengthened or significantly raised. Freeboard for the existing bridge appears to be in excess of 5-ft for the 100-yr event. For constructability purposes the new bridge will be either slightly longer or shorter than the existing. Similarly, the height will be equal to or slightly higher than existing. The concept profile shows the bridge being raised approximately 1-2 ft which would not affect any adjacent intersections as they are over 500-ft away. Final bridge length and height will be confirmed in preliminary design phase.
Bridge ID # 121-5272-0	The existing bridge was constructed in 1995. The existing bridge is 190'-0" long and 41'-3" wide (out to out)	Single bridge replacing dual bridges. See description for 121-0077-0.

SR 120 EBL over Big Creek	and consists of five AASHTO Type I Mod PSC beam spans. The existing section includes 2 - 1'-6" wide jersey barriers, 2 - 12'-0" travel lanes, 1 - 4'-0" inside shoulder and 1 - 10'-0" outside shoulder	
Retaining walls	There are no existing retaining walls	No retaining walls are currently proposed; however, it is likely that some will be needed around the bridge to minimize impacts to property and the Big Creek Greenway. Detailed grading will be done during the Preliminary Phase. The cost estimate currently includes an item for walls as a conservative measure to mitigate risk of future budget shortfall.

Accelerated Bridge Construction (ABC) techniques anticipated: ☒ No ☐ Yes

No ABC techniques are anticipated. Maintenance of traffic can be accomplished utilizing portions of the existing/proposed bridges for all stages of construction. Closure of the trail below will be minimized with the use of protective platforms and netting.

Mainline Design Features:

SR120/Old Milton Parkway	Functional Classification: <i>Principal Arterial</i>		
Feature	Existing	*Policy	Proposed
Typical Section:			
- Number of Through Lanes (One Direction)	2		3
- Lane Width(s)	12 ft	11 – 12 ft	11-12 ft
- Median Width (-ft) & Type	42 ft / Depressed	20 ft / Raised	20 ft / Raised **
- Shoulder Width (-ft) (Outside)	N/A	N/A	N/A
- Border Area Width (-ft)	10.5 – 15.5 ft	10 – 16 ft	10.5 – 15.5 ft (11.5 ft Proposed)
- Cross Slope (%)	Varies	2%	Varies. DV will be requested.
- Outside Shoulder Slope (%)	N/A	N/A	N/A
- Inside Shoulder Width (-ft)	N/A	N/A	N/A
- Sidewalks (-ft) (Type?)	4 – 5ft / Concrete	5 ft / Concrete	4 – 5ft / Concrete
- Auxiliary Lanes (# LTL, RTL or TWLTL / -ft width)	1 RTL / 12 ft 1 – 2 LTL / 12 ft		1 RTL / 12 ft 1 – 2 LTL / 12 ft
- Bike Accommodations	N/A	N/A	N/A
Posted Speed (mph)	45 mph		45 mph
Design Speed (mph)	45 mph	45 mph	45 mph
Minimum Horizontal Curve Radius (-ft)	1250 ft	711 ft	1250 ft
Maximum Superelevation Rate (%)	4%	4%	4%
Maximum Grade (%)	7%	7%	7%
Access Control	Permitted	Permitted	Permitted
Design Vehicle	WB-40		WB-40
Check Vehicle	N/A		N/A
Pavement Type	Asphalt		Asphalt

*According to current GDOT Design Policy if applicable

** 20 foot raised median is typical for project varies from 6 foot to about 40 foot in select areas

Right-of-Way (ROW): Existing width: 135 – 160 ft. Proposed width: 135 – 170 ft.

Required Right-of-Way anticipated: ☐ None ☒ Yes ☐ Undetermined

Easements anticipated: ☐ None ☐ Temporary ☒ Permanent * ☐ Utility ☐ Other

* Permanent easements include the right to place utilities.

Anticipated total number of impacted parcels: <i>(This number includes 5 City-owned parcels, that will not have to be purchased so the ROW estimate only shows 13 parcels)</i>		18
Displacements anticipated:	Businesses:	0
	Residences:	0
	Other:	0
Total Displacements:		0

Location and Design approval: ☐ Not Required ☒ Required

Impacts to USACE property anticipated: ☒ No ☐ Yes ☐ Undetermined

ENVIRONMENTAL & PERMITS

Anticipated Environmental Document: NEPA ~ EA-FONSI

Level of Environmental Analysis:

- ☒ The environmental considerations noted below are based on preliminary desktop or screening level environmental analysis and are subject to revision after the completion of resource identification, delineation, and agency concurrence.
- ☐ The environmental considerations noted below are based on the completion of resource identification, delineation, and agency concurrence.

GDOT MS4 Permit Compliance – Is the project located in a GDOT MS4 area? ☐ No ☒ Yes

If yes, is the GDOT MS4 Permit anticipated to apply to all or part of this project? ☐ No ☒ Yes

Is Non-MS4 water quality mitigation anticipated? ☒ No ☐ Yes

Environmental Permits/Variations/Commitments/Coordination anticipated:

Permit/Variance/Commitment/ Coordination Anticipated	No	Yes	Remarks
1. U.S. Coast Guard Permit	☒	☐	
2. Forest Service/NPS	☒	☐	
3. CWA Section 404 Permit	☐	☒	A Regional or Nationwide 404 permit is anticipated.
4. Tennessee Valley Authority Permit	☒	☐	
5. USACE Real Estate Outgrant	☒	☐	
6. Buffer Variance	☐	☒	To be confirmed as project develops
7. Coastal Zone Management Coordination	☒	☐	
8. NPDES	☐	☒	Anticipated land disturbances of over 1 acre

agreement effective May 1, 2020 determining that quantitative CO project-level analyses are not required for projects located in CO attainment areas throughout Georgia.

The proposed project would widen SR 120 / Old Milton Pkwy from North Point Pkwy to Kimball Bridge Road from four to six lanes. The opening year of the project is anticipated to be 2027. This project is included in the ARC Transportation Improvement Program for FY 2020-2025 by reference number FN-176. It is modeled in the ARC Travel Demand Model for network year 2030, which is the nearest model year to the projects actual opening year, it is modeled as a 4 lane to 6 lane widening and the project limits shown in the TIP are from North Point Pkwy to Kimball Bridge Rd matching the current project description.

Noise Effects: Due to the use of federal funds, a noise assessment would be required for this project. Because the project is proposing to add through-traffic lanes a Type I noise study is anticipated. This level of analysis will require computer modeling of the corridor using FHWA's Traffic Noise Model v2.5 to determine locations which may be impacted by noise and if any noise barriers would be feasible or reasonable to be implemented with the project.

Public Involvement: A virtual Public Information Open House (PIOH) was held between May 10, 2021 and June 22, 2021. The Public Involvement website had 695 visitors and 31 responses were received (13 in favor of the project, 11 against the project, and 7 with conditional support). The most frequently cited topics were support for congestion relief, preference to maintain median aesthetics, and pedestrian safety. A response letter is being developed and will be sent in July 2021. Should the NEPA document remain an EA, a Public Hearing Open House would be required prior to the approval of the NEPA document. No detour is anticipated.

Major stakeholders: Major stakeholders include the City of Alpharetta, the travelling public, users of the Big Creek Greenway, businesses located along the corridor, MARTA, and the Georgia Department of Transportation.

CONSTRUCTION

Issues potentially affecting constructability/construction schedule:

The project construction is not anticipated to be complex. The additional lanes will be constructed in the median as will the large majority of the proposed drainage. No work to the urban shoulders will occur except in the immediate vicinity of the bridge due to the wider bridge needed. Utility and right of way impacts will be minimal when compared to typical 2-mile, four-to-six lane widening projects.

Bridge over Big Creek: The project will replace the two existing bridges (EB & WB), that span over Big Creek and the Big Creek Greenway Trail, with one wider bridge. The bridge reconstruction will be staged construction.

Big Creek Trail: Big Creek Trail will be protected during the construction activities by a temporary debris shield. However, there would need to be short-term closures for any item of work requiring a crane lift over the trail (Removal of old beams, setting new beams, etc).

Early Completion Incentives recommended for consideration: ☒ No ☐ Yes

COORDINATION, ACTIVITIES, RESPONSIBILITIES, AND COSTS

Initial Concept Team Meeting: N/A

Concept Team Meeting: April 8th, 2021

Other coordination to date:

June 12th, 2020 Scoping Meeting with OES to discuss Level of Environmental Document

Project Activity	Party Responsible for Performing Task(s)
Concept Development	City of Alpharetta / AECOM
Design	City of Alpharetta / AECOM
Right-of-Way Acquisition	City of Alpharetta / Gresham Smith & Partners
Utility Coordination (Preconstruction)	GDOT Utility Office
Utility Relocation (Construction)	Utility Owners
Letting to Contract	GDOT Contracts and Bidding Office
Construction Supervision	GDOT Construction Office
Providing Material Pits	Contractor
Providing Detours	Contractor
Environmental Studies, Documents, & Permits	City of Alpharetta / AECOM
Environmental Mitigation	Contractor
Construction Inspection & Materials Testing	Contractor

Project Cost Estimate Summary and Funding Responsibilities:						
	PE Activities		ROW	Reimbursable Utilities	CST	Total Cost
	PE Funding	Section 404 Mitigation				
Date of Estimate:	3/19/2021	3/19/2021	3/19/2021	3/19/2021	3/19/2021	
Funded By:	Local	Local	Local	State / Federal	State / Federal	
Programmed Cost:	\$2,050,000		\$2,000,000	\$0	\$25,000,000	\$29,050,000
Estimated Cost:	\$2,050,000	TBD	\$1,506,000	\$70,000	\$25,570,795	\$29,196,795
Total Cost Difference:						-\$146,795

ALTERNATIVES DISCUSSION

Alternative selection:

Preferred Alternative: Inside Widening			
Estimated Property Impacts:	18 Parcels	Estimated Total Cost:	\$29,196,795
Estimated ROW Cost:	\$1,506,000	Estimated CST Time:	30 Months
Rationale: The preferred alternative widens SR120/Old Milton Parkway to the inside median. The existing 42-ft depressed median was originally chosen to facilitate future expansion and this project intends to fulfill that purpose. An additional 11-ft lane will be constructed in each direction leaving a standard 20-ft raised, landscaped median. The existing grade will be maintained to allow for resurfacing of the existing pavement and the existing outside curb & gutter will be retained. The inside lanes will be sloped to drain towards the median and the new stormwater pipe will also be constructed in the median leaving the outside shoulders relatively intact. There are many benefits to limiting the construction to the median and avoiding significant impacts to the shoulders including reduced impacts and costs for construction, right of way, and utilities, and simplified maintenance of traffic. The two existing bridges over Big Creek will be reconstructed as one wider bridge to better accommodate the left turn lanes needed for the North Point Parkway intersection. The approaches to the bridge are the only areas of the project that will require reconstruction of the outside shoulders and possibly a slight grade change; this will be confirmed during Preliminary Design. This alternative was selected since it provides the same level of improvements to traffic performance as the other alternatives but at a fraction of the cost and impacts. The B/C ratio for the project would be 2.98 based on Operations and Safety benefit. Widening the roadway to 6-lanes would reduce congestion along the corridor which would subsequently reduce overall crashes. Furthermore, reduction in congestion would reduce the likelihood and occurrence of rear end crashes along the corridor.			

Alternative 1: Outside Widening			
Estimated Property Impacts:	63 Parcels	Estimated Total Cost:	\$41.8M
Estimated ROW Cost:	\$11.2M	Estimated CST Time:	42 Months
Rationale: Alternative 1 widens SR120/Old Milton Parkway to the outside by connecting the existing right turn lanes. This option is otherwise very similar to the Preferred Alternative. Achieving the widening by connecting the right turn lanes requires extensive reconstruction of the outside shoulders which will result in higher construction, right of way, and utility costs and impacts. In addition, the loss of the right turn lanes would result in more rear-end crashes. This alternative results in greater impacts to adjacent properties and environmental resources, and significantly more construction scope while providing the same level of improvements to traffic performance. For these reasons, it was not selected.			

Alternative 2: Grade Separation			
Estimated Property Impacts:	15 Parcels	Estimated Total Cost:	\$32.5M
Estimated ROW Cost:	\$5.3M	Estimated CST Time:	48 Months
Rationale: Alternative 2 grade separates the intersection of SR120/Old Milton Parkway and North Point Parkway, which is the busiest intersection along the corridor and one of the busiest in the City. The alignment of NPP would be shifted to the west and taken up and over OMP. The north and south legs of the existing intersection would be converted to right-in/right-out operation and connected to the relocated NPP overpass alignment to allow for full directional access. This alternative provides comparable traffic delay benefits to the Preferred Alternative and Alternative 1 but from a lane-call standpoint, there is a need for widening Old Milton Parkway to six lanes beginning in the existing year for the specified project limits. In addition, the construction cost and property impacts were both higher for this option compared to the Preferred Alternative. Although less parcels are impacted, the new location nature of the grade-separation would require much more required right of way. For these reasons, this alternative was not selected.			

No-Build Alternative: No build does not meet the need and purpose of the project			
Estimated Property Impacts:	0	Estimated Total Cost:	\$0
Estimated ROW Cost:	\$0	Estimated CST Time:	0
Rationale: Not providing widening from 4 to 6 lanes would result in increased congestion.			

Existing Traffic Conditions

Atlanta Regional Commission (ARC) Traffic Demand Model (TDM) data was utilized to estimate Level of Service (LOS) and travel time within the proposed project limits for the year 2030 and 2050 under a no-build and build condition, assuming the addition of one new lane in each direction. The 2018 AADT volume from the Traffic Analysis & Data Application (TADA) is 52,000 vehicles per day (vpd) and grows to 59,450 vpd in the opening year 2027 and 65,675 vpd in the design year 2047. The ARC TDM shows LOS E for the year 2030 and 2050 no-build condition, LOS D for the year 2030 build condition, and LOS E for the year 2050 build condition. Furthermore, TDM-based travel times show a reduction of two (2) minutes per vehicle in 2030 and 2.7 minutes per vehicle in 2050 which represents a 17% and 19% reduction in travel time, respectively. The need for capacity improvements is evident.

A planning-level crash analysis using the most recent data available, from 2015-2019, showed the corridor exceeded the statewide average for crash rate for all years (2015 thru 2019) and injury rate (2015 thru 2019).

Figure 2. Crash Data

Year	Length (miles)	AADT	VMT	SR 120 Total Crashes			SR 120 Rates			Statewide Rates		
				All Crashes	Injury Crashes	Fatal Crashes	All Crashes Rate	Injury Rate	Fatal Rate	All Crashes Rate	Injury Rate	Fatal Rate
2015	1.94	51,000	98,940	282	67	0	781	186	0	583	138	1.24
2016	1.94	51,000	98,940	316	75	0	875	208	0	628	145	1.47
2017	1.94	51,000	98,940	272	62	0	753	172	0	615	149	1.24
2018	1.94	51,000	98,940	223	60	0	618	166	0	581	141	1.46
2019	1.94	51,000	98,940	267	72	0	739	199	0	559	137	1.41
Total/ Average	1.94	51,000	98,940	1360	336	0	753	186	0	602	143	1.35

Segment forecasted traffic volumes were compared to generalized LOS volume thresholds for Urban Signalized Arterial roadways. This comparison revealed LOS F conditions on five of six analysis segments in the Existing and No-Build Open Year (2027) and on all segments in the No-Build Design Year (2047) on SR 120. This further exemplifies the need for capacity improvement on the corridor.

Figure 3. Existing and No Build LOS

ROAD SEGMENT	Existing Year	2027 (Opening Year)	2047 (Design Year)
	AADT (LOS)	AADT (LOS)	AADT (LOS)
	Existing	No Build	No Build
North Point Pkwy to Brookside Pkwy West/ Cotton Creek Entry	50,950 (F)	52,775 (F)	59,275 (F)
Brookside Pkwy West/ Cotton Creek Entry to Brookside Pkwy East/ Vista Forest Dr	47,125 (F)	48,775 (F)	53,900 (F)
Brookside Pkwy East/ Vista Forest Dr to Alexander Dr	46,750 (F)	48,400 (F)	53,500 (F)
Alexander Dr to Southbridge Pkwy	49,175 (F)	50,900 (F)	56,275 (F)
Southbridge Pkwy to Alpharetta Pkwy/ State Bridge Way	46,525 (F)	48,175 (F)	53,225 (F)
Alpharetta Pkwy/ State Bridge Way to Kimball Bridge Rd	37,450 (C)	38,800 (C)	42,875 (F)

AADT = Annual Average Daily Traffic; LOS = Level of Service

¹Analysis used Generalized Service Volume tables from FDOT QLOS handbook.

Intersection Name	No Build Open						Build Open					
	AM			PM			AM			PM		
	V/C*	LOS	Delay	V/C*	LOS	Delay	V/C*	LOS	Delay	V/C*	LOS	Delay
North Point Pkwy	0.91	C	31.0	0.72	D	40.4	0.93	C	34.2	0.71	D	35.5
First Watch Restaurant	0.20	E	37.0	0.03	B	11.9	0.10	C	17.2	0.03	B	12.3
Caribbean fiesta	0.00	C	17.3	0.03	B	12.2	0.00	B	11.7	0.03	B	11.4
Olde Milton Commons Driveway	0.20	E	37.0	0.23	C	15.4	0.10	C	17.2	0.21	B	13.5
Brookside One and Two Dwy	0.00	B	12.8	0.05	B	12.3	0.00	B	11.5	0.05	B	11.5
Waters Ferry Dr/Dunkin	0.87	F	104.8	0.06	B	13.5	0.39	C	22.8	0.05	B	12.0
Cotton Creek/Brookside Pkwy W	0.93	A	6.4	0.62	A	6.4	1.34	A	2.2	0.49	A	5.7
Cotton Mill Pl	0.01	D	32.1	0.03	B	12.7	0.00	C	16.6	0.03	B	11.5
Aspen Station Plaza Dwy	0.00	B	12.2	0.03	B	11.7	0.00	B	11.3	0.03	B	11.2
Mansions at Alpharetta	0.01	B	12.0	0.01	B	11.6	0.01	B	11.4	0.01	B	11.1
Camden Way	0.12	E	35.1	0.01	B	12.5	0.05	C	17.2	0.01	B	11.6
Hi Rez Studios Dwy	0.00	B	11.9	0.02	B	11.7	0.00	B	11.3	0.02	B	11.1
Folia Cir	0.02	C	15.6	0.00	B	11.2	0.02	C	16.7	0.00	B	11.5
Bridge Pointe Dr	0.20	E	37.5	0.03	B	12.7	0.11	C	17.9	0.03	B	11.7
Bruster's Real Icecream Dwy	0.01	B	12.0	0.06	B	11.9	0.01	B	11.4	0.06	B	11.4
Vista Forest Dr/Brookside Pkwy E	0.90	A	7.7	0.58	A	6.3	0.98	A	3.5	0.52	B	13.5
Rockberry Ln	0.09	C	16.0	0.04	B	11.3	0.12	C	17.4	0.04	B	11.6
Chevron Gas Station Dwy	0.07	B	11.9	0.09	B	11.8	0.07	B	11.4	0.10	B	11.5
Old Milton Village Dwy	0.08	D	32.7	0.06	B	12.4	0.03	C	16.4	0.06	B	11.5
Jersey Mike's subs Dwy	-	-	-	-	-	-	-	-	-	-	-	-
Park Bridge Pkwy/ Alexander Dr	1.05	C	20.9	0.57	A	8.7	0.78	A	3.6	0.62	A	4.7
Park Woods Cir	0.04	D	33.2	0.07	C	17.3	0.02	C	16.7	0.04	B	12.0
Fedex Dwy	0.04	D	33.7	0.34	C	21.0	0.02	C	17.4	0.22	B	13.3
The Swan Building Dwy	0.02	B	11.4	0.00	B	13.3	0.02	B	10.9	0.00	B	11.9
Parkview Ln/ South Bridge Pkwy	0.73	A	9.3	0.57	A	9.5	0.77	B	11.3	0.45	B	10.8
Polkadot Dentistry	0.05	C	15.5	0.03	B	11.4	0.05	C	16.6	0.03	B	11.7
Alpharetta Commons	0.03	B	11.2	0.12	B	13.5	0.03	B	11.0	0.12	B	12.4
State Bridge Way/Chick-fil-A	0.78	A	2.8	0.65	A	2.5	0.80	A	6.7	0.61	A	1.8
Shell Gas Station	0.02	C	17.2	0.02	A	9.9	0.02	C	18.4	0.02	B	10.2
Carland Service Center	0.02	B	10.8	0.02	B	11.6	0.02	B	10.9	0.02	B	12.0
Sherwin-Williams Paint Store	-	-	-	-	-	-	-	-	-	-	-	-
Kimball Bridge Rd	0.79	D	38.5	0.63	D	53.0	0.84	D	51.0	0.66	D	53.0

*V/C ratios are for worst movement



Location and Design Report

Template version: 2022.10.14

DATE: 10/19/2023

FILE: P.I.# 0017187
Fulton County / GDOT District 7 - Metro Atlanta
SR 120 FROM NORTH POINT PKWY TO KIMBALL BRIDGE ROAD

FROM: *for* Kimberly Nesbitt, State Program Delivery Administrator

TO: R. Christopher Rudd, P.E., State Design Policy Engineer
Attn: Dave Peters, P.E., State Conceptual Design Group Manager

SUBJECT: Request for Location and Design Approval

Description and Project Proposal:

The project widens SR 120/Old Milton Parkway from 4-lanes to 6-lanes with a 20-foot raised median from North Point Parkway to Kimball Bridge Road. All the widening except near the bridge over Big Creek will be to the inside. Total project length is approximately 2 miles. The project will replace the two existing bridges (EB & WB), that span over Big Creek and the Big Creek Greenway Trail, with one wider bridge.

The City of Alpharetta would be responsible for acquiring any property rights required for this project.

Concept Approval Date:

0017187_CR_Mar2021 Approved (March 21, 2022)

Concept Update: N/A

Environmental Document Type: NEPA - CE

Approval Date: January 19, 2024

Public Involvement:

Previous public and stakeholder involvement:

- A virtual Public Information Open House (PIOH) was held between 5/10/21 and 6/10/22. A total of 695 people visited the open house website. Of the 31 respondents who formally commented, 13 were in support of the project, 11 were opposed, 0 were uncommitted, and 7 expressed conditional support. A public comment response letter was sent on 7/2/21.
 - Activities included:
 - Virtual Public Involvement Open House (PIOH)

- There is no public controversy as evidenced by public or stakeholder involvement conducted in accordance with GDOT's Public Involvement Plan or by other communications (e.g. phone calls, emails, letters, text messages, meetings with GDOT officials).

Consistency with Approved Planning: The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: Recommend that the location and design for the project be approved and that the attached Notice be approved for advertising.

Concur: Christopher Rudd 01/30/2024
GDOT Director of Engineering Date

Approve: David Norwood 1/31/2024
For GDOT Chief Engineer Digitally signed by David Norwood
Date: 2024.01.31 08:20:01 -05'00' Date

DATE OF LOCATION AND DESIGN APPROVAL:



January 31, 2024

(To be entered by State Conceptual Design
Group Manager)

Attachments:

- Location Map
- Notice of Location and Design Approval

PROJECT LOCATION MAP

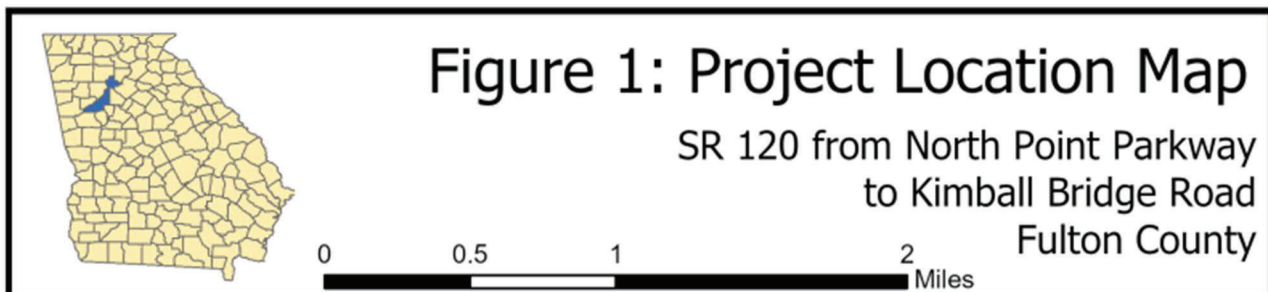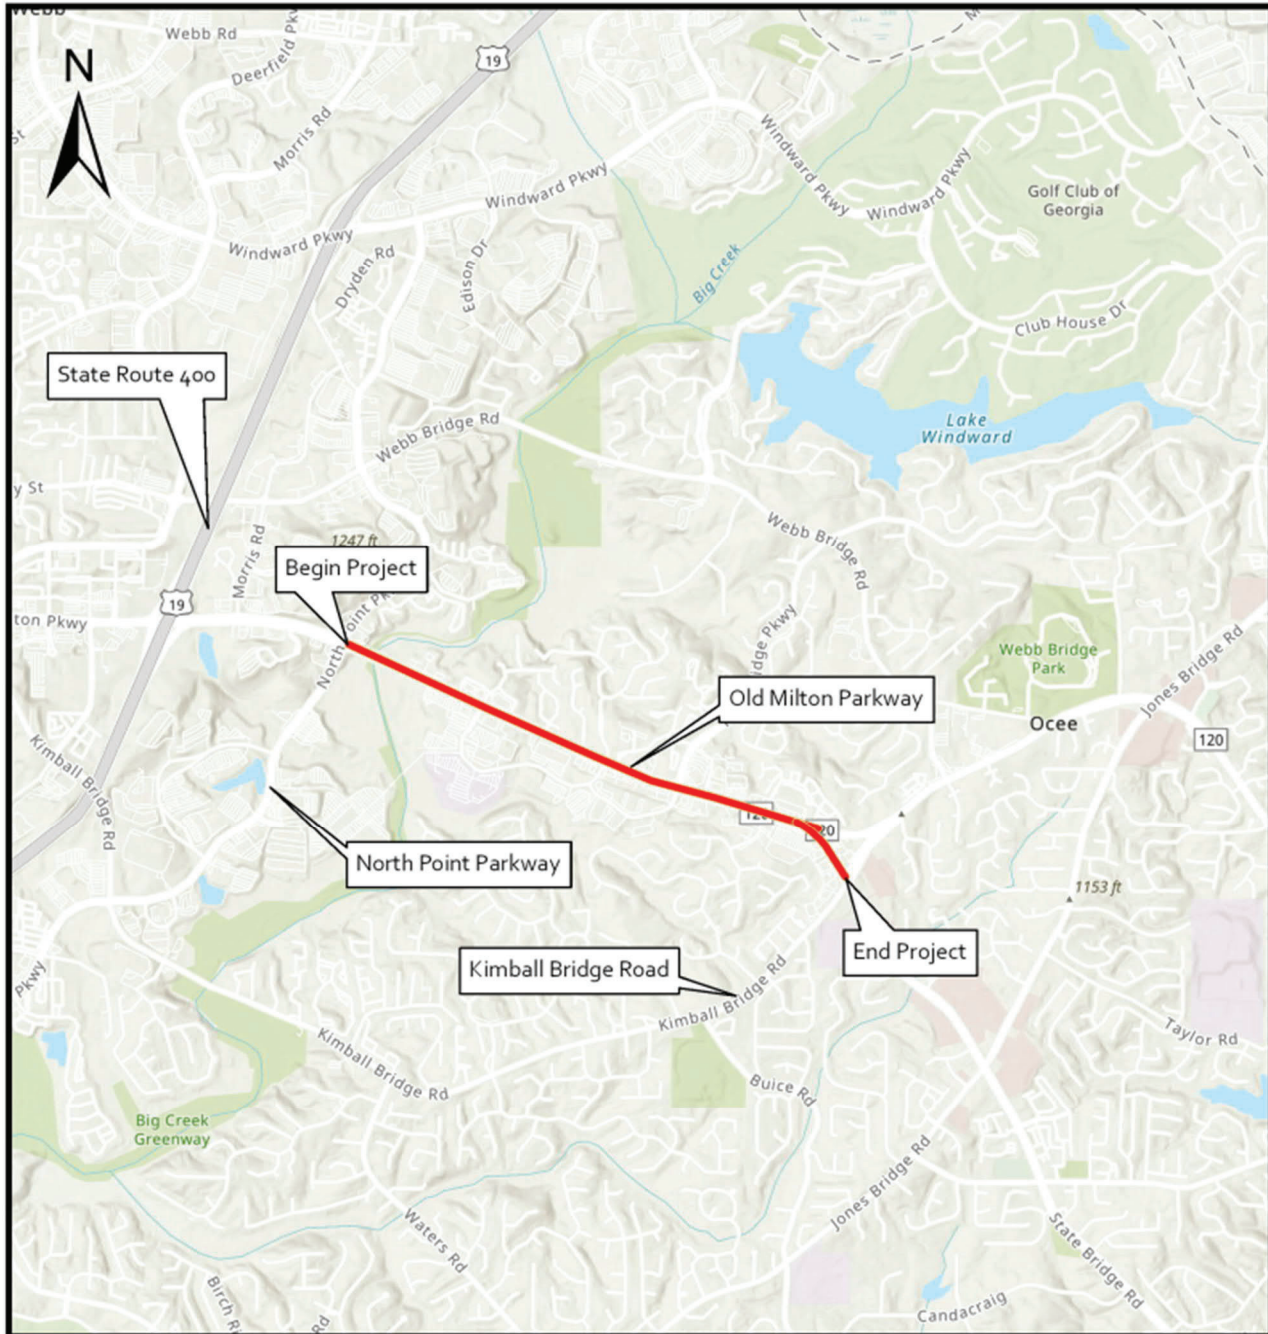

NOTICE OF LOCATION AND DESIGN APPROVAL

P. I. 0017187

FULTON COUNTY

Notice is hereby given in compliance with Georgia Code 22-2-109 and 32-3-5 that the Georgia Department of Transportation has approved the Location and Design of this project.

The date of location and design approval is: January 31, 2024

The proposed project is located in Fulton County and is within Land District 1. The proposed project intends to widen SR 120/Old Milton Parkway from 4-lanes to 6-lanes with a 20-foot raised median from North Point Parkway to Kimball Bridge Road. All the widening except near the bridge over Big Creek will be to the inside. Total project length is approximately 2 miles. The project will replace the two existing bridges (EB & WB), that span over Big Creek and the Big Creek Greenway Trail, with one wider bridge.

The City of Alpharetta would be responsible for acquiring property rights for this project.

Drawings or maps or plats of the proposed project, as approved, are on file and are available for public inspection at the Georgia Department of Transportation:

Britni McCullough – Area Manager
District 7, Area 2
bmccullough@dot.ga.gov
1268 Kennestone Circle
Marietta, GA 30065
478-234-7985

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

Kimberly Nesbitt, Office of Program Delivery Administrator
Attn: Rodney Leverette, Project Manager
RLeverette@dot.ga.gov
600 West Peachtree Street NW
Atlanta, Ga. 30308
(404) 424-9033

Any written request or communication in reference to this project or notice SHOULD include the Project and P. I. Numbers as noted at the top of this notice.